

SAFETY EYEWEAR

PRODUCT DESCRIPTION:

The Scout visitor specs.

- Polycarbonate unilens;
- Hard coat lens available to resist scratching;
- Can be worn over prescription eyewear;
- Vented temples for reduced fogging;
- Exceeds ANSI Z87.1-2003+ High Impact Requirements.

Applications:

Used for general manufacturing and anywhere eye protection is needed.

TECHNICAL DATA:

Base Curve: 4

Packaging: 36 units per box, 144 units per case

Case Dimensions: (cm) - 70 x 39.5 x 32.5 / (in) - 27.6 x 15.6 x 12.8

(Dispenser pack) (cm) - 77 x 36.0 x 32.5 / (in) - 30.3 x 14.2 x 12.8

Case Weight: 18.6 lbs / 8.4 kg

Manufacturer Certifications: ISO9001:2000 certified

Country of Origin/Harmonization Code: Taiwan/9004.90.0000



Polycarbonate lenses block 99.9% of the sun's ultraviolet rays. This ultraviolet protection has already been incorporated within the lens material when the lenses are being produced.


Item #	Lens Material	Lens Color	Lens Coating	Frame Design	Frame Color	UPC # Box	UPC # Case
250-99-0900	Polycarbonate	Clear	Hard coat	Full frame, vented temples	Clear	01616314024771	02616314024771
250-99-0980	Polycarbonate	Clear	None	Full frame, vented temples, CE EN 166 Certified	Clear	01616314025136	02616314025136
250-99-0901	Polycarbonate	Gray	None	Full frame, vented temples	Clear	01616314025143	02616314025143

Also available: Visitor Specs Dispenser 12-pack

Item #	Dimensions	Lens Material	Lens Color	Lens Coating	Frame Design	Frame Color	UPC # Box	UPC # Case
250-99-0980DP	(cm) 38.1 x 17.1 x 10.2 (in) 15 x 6.75 x 4	Polycarbonate	Clear	None	Full frame, vented temples	Clear	01616314027598	02616314027598

DIMENSIONS:

Size Available	One size
Overall Length (mm) - A (in)	155 6.1
Lens Height (mm) - B (in)	57 2.2
Overall Width (mm) - C (in)	153 6.0

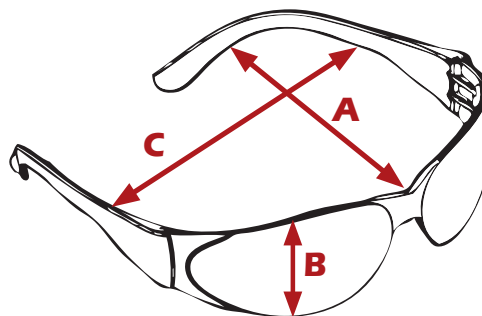

This document is the property of PIP and the information contained herein is proprietary to PIP.