



**PROTECTIVE INDUSTRIAL PRODUCTS**

# 19-D434 Specification Sheet

## COATED GLOVES MADE WITH DYNEEMA®

### PRODUCT DESCRIPTION:

G-Tek® CR Ultra, 13 gauge, salt and pepper Dyneema® yarn/black nylon blend shell, black foam nitrile coated palm and finger tips.

- Washable, resistant to water and ultraviolet light.
- Seamless construction.
- Color coded hems for easy size identification.
- Silicone-free.
- Dyneema® is a brand of polyethylene fibers that are 10 to 15 times stronger than steel, more durable than polyester and a strength that is 40% greater than aramid fiber.

### Applications:

Used for electronics, glass cutting, metal handling, food processing and meat processing.

### TECHNICAL DATA:

**Material:** Dyneema® yarn/foam nitrile coating

**Color:** Gray/black

**Cuff Style:** Continuous knit

**Available Sizes:** S - XL

**Packaging:** 12 pairs per dozen, 12 dozen per case

**Case Dimensions (cm):** 53 X 45 X 26 / (in): 20.9 x 17.7 x 10.2

**Case Weight:** (S) 23.1 lbs / 10.5 kg

(M) 24.9 lbs / 11.3 kg

(L) 28.6 lbs / 13.0 kg

(XL) 31.9 lbs / 14.5 kg

**Manufacturer Certifications:** ISO9001:2000 certified

**Country of Origin/Harmonization Code:** China/6116.10.6500

### Laundrying Instructions:

Recommend washing gloves in slightly warm water not exceeding 40° C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140° F (60° C)

### PERFORMANCE PROPERTIES:

ASTM F1790-04: 552 grams +/- 10%

EN388: 4343

Abrasion	0	1	2	3	4	
Cut	0	1	2	3	4	5
Tear	0	1	2	3	4	
Puncture	0	1	2	3	4	




BARCODE #	DOZEN	CASE
19-D434/XL	01616314048486	02616314048485
19-D434/L	01616314048479	02616314048478
19-D434/M	01616314048462	02616314048461
19-D434/S	01616314048455	02616314048454



### DIMENSIONS:

Size Available	S	M	L	XL
Over Length (cm) - A	23.0	24.0	25.0	26.0
(in)	9.1	9.4	9.8	10.2
Palm Width (cm) - B	9.0	9.5	10.0	10.5
(in)	3.5	3.7	3.9	4.1
Hem Color	Red	Yellow	Brown	Black

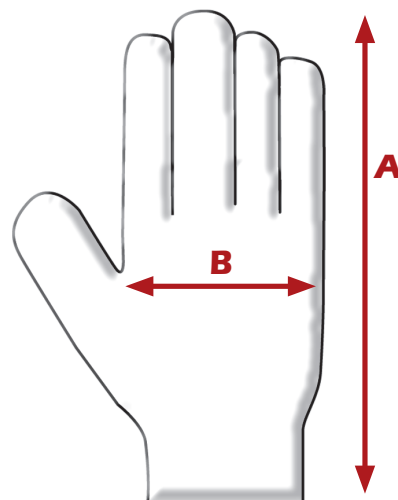

This document is the property of PIP and the information contained herein is proprietary to PIP.