



**PROTECTIVE INDUSTRIAL PRODUCTS**

# 19-D660 Specification Sheet

## COATED GLOVES MADE WITH DYNEEMA®

### PRODUCT DESCRIPTION:

G-Tek® Ultra, gray Dyneema®, nylon plaited, gray polyurethane coated palm and finger tips.

- Washable, resistant to chemicals, water and ultraviolet light.
- Seamless construction.
- Color coded hems for easy size identification.
- Silicone-free.
- Dyneema® is a brand of polyethylene fibers that are 10 to 15 times stronger than steel, more durable than polyester and a strength that is 40% greater than aramid fiber.

### Applications:

Used for electronics, glass cutting, metal handling, food processing and meat processing.

### TECHNICAL DATA:

**Material:** Dyneema®, nylon, polyurethane

**Color:** Gray

**Cuff Style:** Continuous knit

**Available Sizes:** S - XL

**Packaging:** 12 pairs per dozen, 12 dozen per case

**Case Dimensions (cm):** 53 x 29.5 x 35.5 / (in): 20.9 x 11.6 x 14.0

**Case Weight:** (S) 16.8 lbs / 7.6 kg

(M) 19.8 lbs / 9.0 kg

(L) 19.8 lbs / 9.0 kg

(XL) 21.6 lbs / 9.8 kg

**Manufacturer Certifications:** ISO9001: 2000 certified

**Country of Origin/Harmonization Code:** China/6116.10.6500

### Laundering Instructions:

Recommend washing gloves in slightly warm water not exceeding 40° C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140° F (60° C)

### PERFORMANCE PROPERTIES:

ASTM F1790-04: 510 grams +/- 10%


EN388: 4342

Abrasion	0	1	2	3	4	5
Cut	0	1	2	3	4	5
Tear	0	1	2	3	4	
Puncture	0	1	2	3	4	



### DIMENSIONS:

Size Available	S	M	L	XL
Over Length (cm) – A (in)	22.0 8.7	23.0 9.1	24.0 9.4	25.0 9.8
Palm Width (cm) – B (in)	8.9 3.5	9.5 3.7	10.0 3.9	10.5 4.1
Hem Color	White	Green	Brown	Yellow

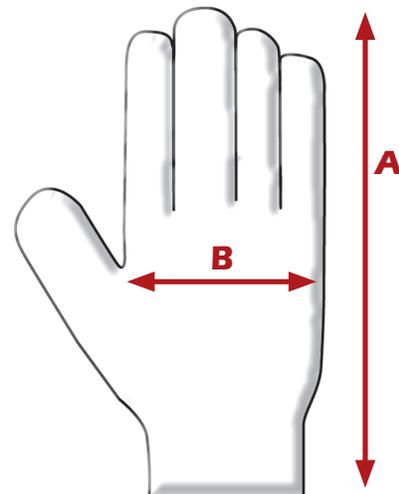

BARCODE #	DOZEN	CASE
19-D660/XL	01616314048561	02616314048560
19-D660/L	01616314048554	02616314048553
19-D660/M	01616314048547	02616314048546
19-D660/S	01616314048530	02616314048539

This document is the property of PIP and the information contained herein is proprietary to PIP.