

EVOLUTION™ DELUXE 6131

STANDARD BRIM - SLIP RATCHET

TECHNICAL SPECIFICATION

HEAD PROTECTION


INSTRUCTIONS FOR USE

Fit hard hat on head and ensure the hard hat is adjusted to the size of the user's head. Fasten chin strap (if available) to ensure fit. The harness depth can also be adjusted on this helmet using the unique "3D Adjustment" setting for a precise fit.

SHELL:
High Density Polyethylene (HDPE)

CHAMLON™ SWEATBAND:
Egyptian cotton core with porous PU coating for maximum sweat absorption. PH neutral, dermatologically tested

WEBBING SUSPENSION:
HDPE Strap & Webbing Clips with Polyester Webbing Straps

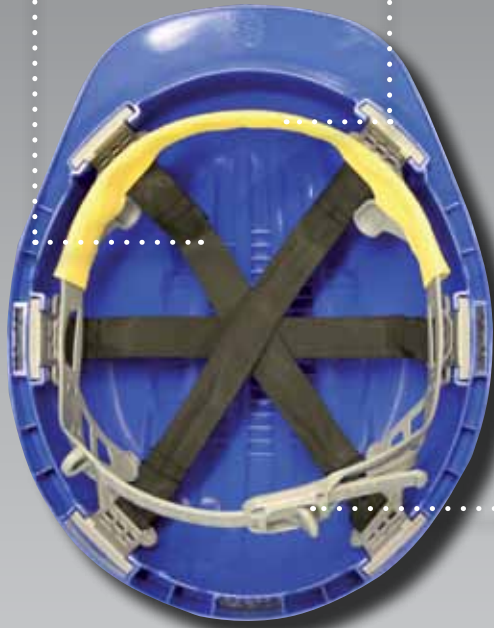

SLIP RATCHET:
EasyJust™ Slip Ratchet version of the EVO6131 Full Brim is so simple to fit that it can be adjusted with just one finger

EasyJust™
FITTING ADJUSTMENT



CLEANING & MAINTENANCE

The shell may be cleaned with soap and warm water and dried with a soft cloth

The hard hat should not be cleaned with chemical or abrasive cleaners

The hard hat should be stored out of direct sunlight

The hard hat should be stored away from chemicals and extremes of temperature

CONFORMITY & TECH DATA

Conforms to ANSI/ISEA Z89.1-2009 Type I Class E (Class C Vented)

Slip Ratchet for wide size range adjustment - High comfort fit

Suspension can be removed and refitted for reverse wearing

Vented and Non-Vented Option

Custom imprinting is available

COO/Harm Code: UAE / 6506.10.6075

EVOLUTION™ DELUXE 6131

STANDARD BRIM - SLIP RATCHET

TECHNICAL SPECIFICATION

HEAD PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 8.4 lbs. (Approx.)



HEIGHT:
18"

LENGTH:
23"

WIDTH:
9.5"

DIMENSIONS OF HARD HAT

Hat Size: 6 7/8 - 8 (20 7/8" - 25")

Weight: 13.2 oz (Approx.)



HARD HAT FEATURES

STANDARDS	ANSI/ISEA Z89.1 - 2009, Type I Class E (Class C Vented)	Yes
PERFORMANCE	Lower Temp (-22° F) Reverse Donning Impact Resistance Electrical Insulation	Yes Yes Yes 54 Joules Yes: Class E 20,000V
SHELL MATERIAL	HDPE Recyclable	Yes Yes
SUSPENSION MATERIAL	HDPE Strap & Clips Polyester Straps	Yes Yes
OPTIONS	Universal Accesories Reflective CR2 option Integrated Eyewear	Yes Yes Yes
SUSPENSION SYSTEM OPTIONS	JSP 3D Slip Ratchet 6-Point	Yes Yes Yes
CHINSTRAP	2pts 4pts	Yes Yes
LOGO OPTIONS	Front, Rear, Side MOQ Logo	Yes 20

ITEM #	COLOR	BRIM	SHELL	UPC - EACH	UPC - CASE	CASE QTY
280-EV6131-10	White	Standard	Non-Vented	5038428136631	5038428811859	10
280-EV6131-20	Yellow	Standard	Non-Vented	5038428136648	5038428811866	10
280-EV6131-30	Green	Standard	Non-Vented	5038428136655	5038428811873	10
280-EV6131-50	Blue	Standard	Non-Vented	5038428136662	5038428811880	10
280-EV6131-60	Red	Standard	Non-Vented	5038428136679	5038428811897	10
280-EV6131-80	Orange	Standard	Non-Vented	5038428136686	5038428811903	10
280-EV6131-LY	Bright Lime/Green	Standard	Non-Vented	5038428136709	5038428811927	10
280-EV6131-OR	Bright Orange	Standard	Non-Vented	5038428136693	5038428811910	10
280-EV6131V-10	White	Standard	Vented	5038428136792	5038428812016	10
280-EV6131V-20	Yellow	Standard	Vented	5038428136808	5038428812023	10

LIMITATIONS OF USE: Protection will only be offered if the hard hat is fitted correctly. Any hard hat subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer. The suspension, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice. The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer.